gas engine PUMP

Driven by a high performing, 5-1/2 HP engine. Lightweight portable unit with rugged carrying handle. Easy portability for water transfer in remote locations. Excellent for floodwater removal when power source is out. Convenient for remote irrigation where water lines are not available. Easy to use with manual throttle, choke, fuel valve and engine shut-off control.

FP5455 — 5-1/2 HP

BEST *1 year warranty*

- Driven by a high performing, 5-1/2 HP engine
- Lightweight portable unit with rugged carrying handle
- Easy portability for water transfer in remote locations
- Excellent for floodwater removal when power source is out
- Convenient for remote irrigation where water lines are not available
- Manual throttle, choke, fuel valve and engine shut-off controls
- Built-in check valve
- 2" hoses and connections sold separately

PERFORMANCE INFORMATION

Distance to Pump Above Water	Gallons per Minute at Discharge Pressure					Max PSI
	15	25	35	45	50	
0 ft.	141	120	95	65	50	58
5 ft.	130	110	85	55	40	55
10 ft.	121	100	75	45	25	52
15 ft.	113	90	65	30	2	50
20 ft.	105	80	55	7	-	48
25 ft.	80	60	40	2	-	45

TYPICAL APPLICATION

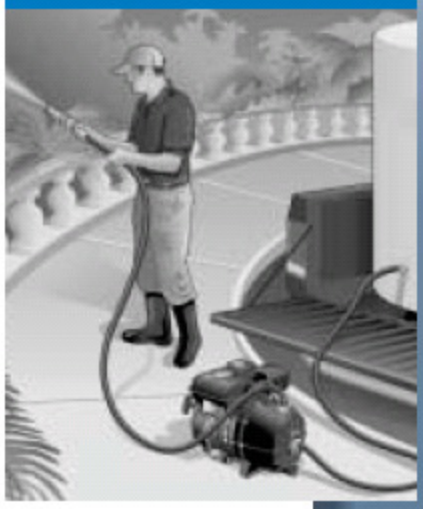

ACCESSORIES (sold separately, see page 20)

Required:

Hose Kits

FP2601 Pump Suction Hose Kit with Fittings and Suction Screen – 1-1/2" x 20'

or

FP2735 Pump Suction Hose Kit with Fittings and Suction Screen – 2" x 15'

FP2602 Pump Discharge Hose Kit with Fittings – 1-1/2" x 25'

or

FP2731 Pump Discharge Hose Kit with Fittings – 2" x 25'